
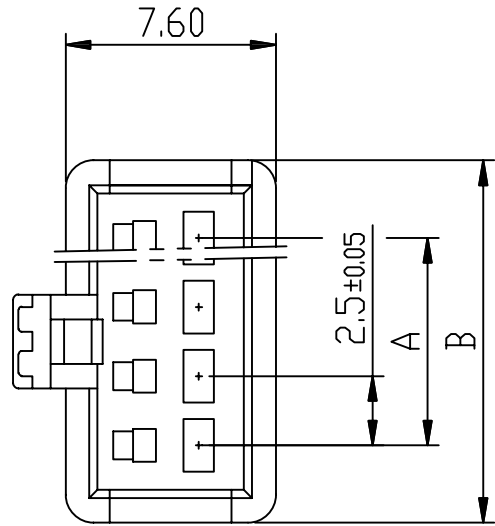


A B C D E F G H

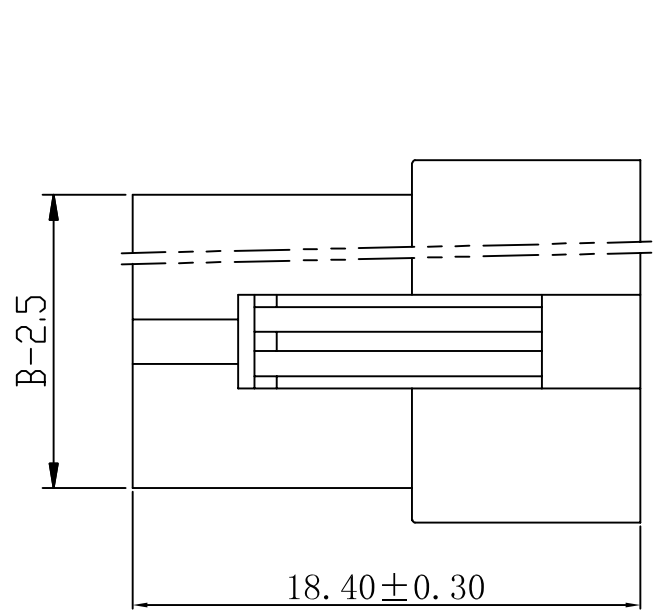

■ SPECIFICATION


- Voltage rating: 250V AC, DC
- Current Rating: 3A, AC, DC
- Withstand voltage: 1000V AC/minute
- Contact resistance:  $10m\Omega$  max
- Insulation resistance:  $500M\Omega$  min
- Temperature range:  $-25^{\circ}C \sim +85^{\circ}C$

■ HOUSING

- Material: PA66 UL94V-0

JVT6504HNO-XX  
 logo 系列码 PIN数 胶壳 PA66 UL94V-0

Poles	Dimensions mm	
	A	B
2	2.50	8.1
3	5.00	10.6
4	7.50	13.1
5	10.00	15.6
6	12.50	18.1
7	15.00	20.6
8	17.50	23.1
9	20.00	25.6
10	22.50	28.1
11	25.00	30.6
12	27.50	33.1
13	30.00	35.6
14	32.50	38.1
15	35.00	40.6
16	37.50	43.1

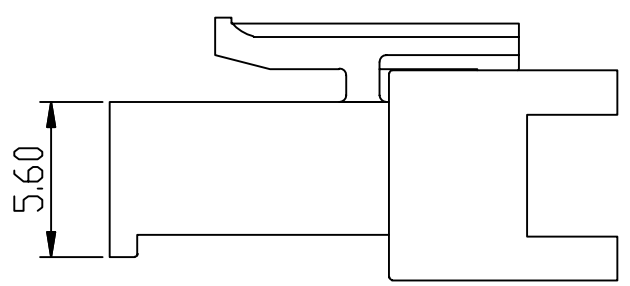

GENERAL TOLERANCE	
0	$\pm 0.35$
.0	$\pm 0.30$
.00	$\pm 0.20$
.000	$\pm 0.10$

版本	变更内容	日期		单位	mm	比例	1:1	日期	20131013
----	------	----	--	----	----	----	-----	----	----------

**乔业电子有限公司**  
 CHYAO YEE CONNECTORS CO., L TD

核准	审核	绘图	品名	SM 2.50mm 母HSG		
	bolly	许向毅	料号	JVT6504HNO-XX		
			图名	041	版本	A

A B C D E F G H